



Quality Built



High Quality Doors



Contact your nearest distributor



Fiberglass Door



- * Wood texture
- * More Durable
- * Low maintenance
- * Polyurethane Core

Door thickness 1-3/4" (4.45cm)

Steel Door



- * Painted 24 gauge galvanized steel
- * Polystyrene core
- * Smooth Finish
- * Low maintenance

Door thickness 1-3/4" (4.45cm)

Consult the different sizes and colors available in our online door designer

Decorative Doorglass



Select from a variety of designs and sizes

DoorFrame



Pinewood Jamb


Oakwood Jamb

Fiberglass composite Jamb

All Jamb can be **painted** or **stained**.

Door jamb may also be **laminated** which increases the protection against damages caused by the sun and humidity. Fiberglass is 100% resistant to these types of damages

Structure

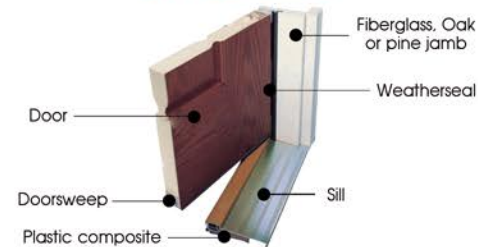

Design and Quote your door

Personalize a door to your liking, selecting different characteristics to fit your needs. Log on to our webpage:



p-tek.com/doorbuilder_language_select.html

Follow us:  @ptekdoor